PrintTex®
Artist Heavy

Fields of application

.01 .02 .04 .05 .07

Specifications

REF. 564250 042

100 % polyester

ca. 155/ 252/ 310/ 505 cm
ca. 61/ 99/ 122/ 199 inch

B-s1, d0 DIN EN 13501-1

ca. 280 g/m²
ca. 7.4 oz/yd²

rolls
50/ 100 m
55/ 109 yd

warp: 1831.6 N (132.9 N)
weft: 2288.7 N (89.9 N)
DIN EN ISO 13934-1 (13937-2)

warp: 60.7 %
weft: 32.3 %
DIN EN ISO 13934-1

Light
blank: 26.9 %
DIN EN 410

UV
blank: 0.0 %
DIN EN 410

blank: 91.01
DIN 5033-1

warp: 0.6 %
weft: 0.3 %
DIN EN 14704-1

cold, heat, ultrasonic cut

Printing methods

UV-CURABLE INK
SOLVENT INK

Individual applications

Certifications

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100
09.0.67573 HOHENSTEIN HTTI
Tested for harmful substances,
www.oeko-tex.com/standard100


PONGS Technical Textiles GmbH
Bahnhofstraße 21
07919 Pausa-Mühltroff
Germany
Phone +49 36645 350-0
salestt@pongs.de
www.pongs.com

We reserve the right for technical modifications.
The above mentioned details are non-binding.
A tolerance of ± 5% is valid. Effective: 2018/10

PrintTex®
Artist Heavy

Fields of application

.01 .02 .04 .05 .07

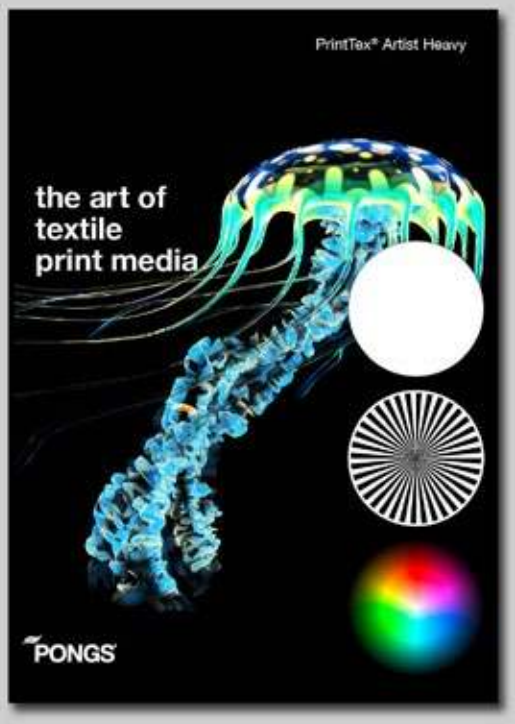

Ref.-Nr.: 564250 042 | Preview print sample

PONGS Technical Textiles GmbH
Bahnhofstraße 21
07919 Pausa-Mühltroff
Germany
Phone +49 36645 350-0
salestt@pongs.de
www.pongs.com

We reserve the right for technical modifications.
The above mentioned details are non-binding.
A tolerance of ± 5% is valid. Effective: 2018/10