# Basic Flag 110 NQ FR

Basic Flag 110 NQ FR is the evolution of Basic Flag 110 FR. The flag maintains all of the advantages of its predecessor, but now offers perfect print-through, making the difference between the front and back virtually invisible. The fabric does not fray and has a weight of 110 g/m². This knitted 100% polyester fabric is flame-retardant, PVC-free, and suitable for flags, banners, as well as (safety) vests. The textile can be printed using both direct sublimation and transfer printing. Fire retardant certified: EN 13501-1

| | |
|---|---|
| **Article Number** | F905FR01A-NQ |
| **Air permeability** | 2276L/m2/S |
| **Base material** | 100% polyester |
| **Core** | 3" |
| **Flame retardant certified** | EN 13501-1 B-s1,d0 |
| **OEKO-TEX® Certified** | Yes |
| **Printing methods** | sublimatie Direct, sublimatie Transfer |
| **Printing side** | Inside |
| **Reach** | Yes |
| **Structure** | Knitted |
| **Sublimation settings** | 200°C – ± 45 seconds |
| **Textile application** | Flag & beachflag, (safety) vests, Outdoor, Banner |
| **Use Indoor & Outdoor** | Yes |
| **Weight textile** | 110 g/m² |

## USP's


- Excellent print-through
- Non fraying
- PVC free
- Flame Retardant


## Available variants

ROLLWIDTH X ROLL LENGTH

100 cm / sample x 10 m
160 cm x 100 m
260 cm x 100 m
320 cm x 100 m
320 cm x 200 m



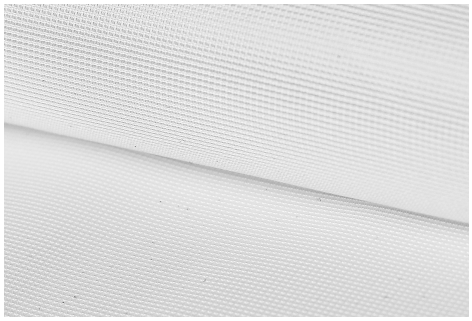

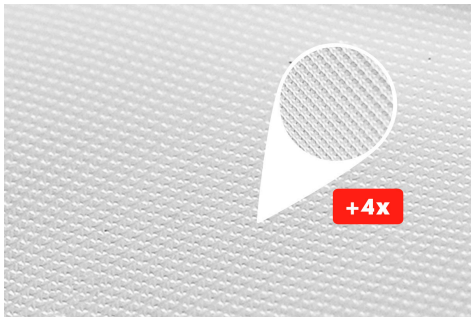


**Notice:** TTS' products must be tested to determine the suitability of the product in combination with your equipment and methods of use. TTS maximum obligation shall be to replace any product supplied by TTS, which has been proven to be defective. TTS is not liable for any injury, direct or consequential, arising from the use of, or the inability to use our products. The above mentioned data are according to the latest state and are non-binding. For all technical data is a valid tolerance of 5%. We reserve the right for technical modifications.

Texo Trade Services | Oostbaan 601 | 2841 ML Moordrecht | The Netherlands
T: +31 182 62 39 44 | E: sales@texo-trade.com | texo-trade.com