TTS printable textiles & transfer printing media

TEXO FABRICS

Display Stretch 240 FR

This very densely knitted display textile of 240 gsm with 5% stretch is the new solution for pop-up (spider) walls and textile tensioning frames; the material can be hung on the frame straight from the box. It is also ideal for premium displays where the frame's cross-brace must not be visible through the cloth. This is frequently a problem with normal display cloth; it is too stiff and has too little stretch capacity to allow creases to fall out and many white creases will stay visible. Furthermore, normal display cloth is just a little too translucent, and you can see the eventual aluminium reinforcement bars through the cloth. Display Stretch 240 is 100% crease-resistant. It is very densely knitted with a fine yarn (83 Dtex), making it virtually opaque. Another result of using the fine yarn is that the colours are much more intense. Fire retardant certified: DIN 4102-1 B1, EN 13501-1 B-s1,d0

Article Number	F935FR02
Base material	100% polyester
Core	3"
Flame retardant certified	DIN 4102-1 B1, EN 13501-1 B-s1,d0
OEKO-TEX® Certified	Yes
Printing methods	sublimatie Direct, sublimatie Transfer, Latex
Printing side	Inside
Reach	Yes
Structure	Knitted
Sublimation settings	195°C – ± 45 seconds
Textile application	Textile frame (SEG), Banner, Pop up system
Use Indoor & Outdoor	No
Weight textile	240 g/m²

USP's


- 5-10% stretch
- Matt finish
- High opacity (no see-through)
- Crease free
- Non fraying / cold cutting
- Flame Retardant
- PVC free

Available variants


ROLLWIDTH X ROLL LENGTH

100 cm / sample x 10 m
160 cm x 75 m
260 cm x 75 m
320 cm x 75 m

SUB DIRECT · SUB PAPER TRANSFER · UV · LTX · SOL · FR · COLD CUT · USE INDOOR · REACH · PVC FREE · PHTHALATE FREE

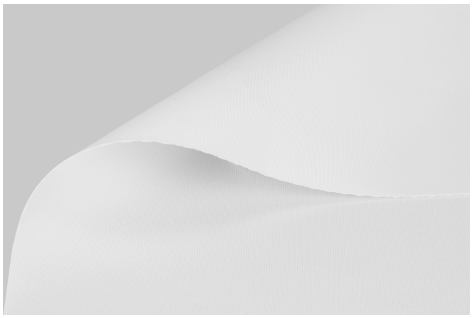



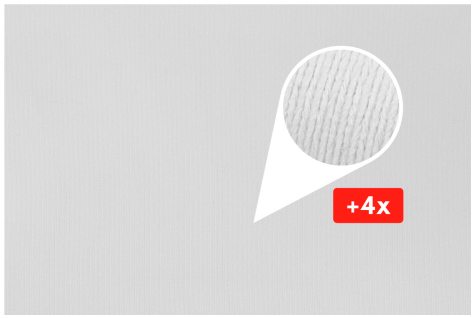

Notice: TTS' products must be tested to determine the suitability of the product in combination with your equipment and methods of use. TTS maximum obligation shall be to replace any product supplied by TTS, which has been proven to be defective. TTS is not liable for any injury, direct or consequential, arising from the use of, or the inability to use our products. The above mentioned data are according to the latest state and are non-binding. For all technical data is a valid tolerance of 5%. We reserve the right for technical modifications.

Texo Trade Services | Oostbaan 601 | 2841 ML Moordrecht | The Netherlands
T: +31 182 62 39 44 | E: sales@texo-trade.com | texo-trade.com